


SylFlat LED Non Dimmable - Recessed

SYLFLAT 1000 ROUND 4000K
0053294



Product features

- Integrated round recessed 165mm diameter LED downlight providing uniform distribution with an opal diffuser, 110° beam angle, 1000LM, 12W, 83lm/W, 4000K, CRI80, non-dimmable, IP20, IK03, 30,000hrs (L70)

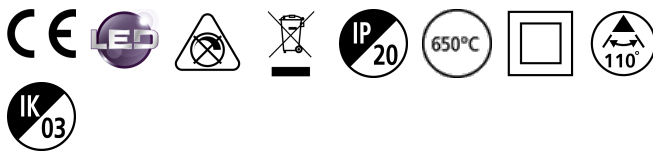


PRODUCT OVERVIEW

IPC Code	0053294
Product name	SYLFLAT 1000 ROUND 4000K
Technology	LED
Housing	Plastic
Mount	Ceiling recessed
Fixture rating	Enclosed
Environment	Internal
General application	Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4274332
E-number SE	7470734
Fixture luminous flux (lm)	1000
Luminous flux (lm)	960
Luminaire efficacy (lm/W)	83
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Glare control	UGR 28
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integrated
Dimmable	No
Average life (Nominal) (h)	30000
Housing colour	White
IP rating	IP20
IK rating	IK03

SylFlat LED Non Dimmable - Recessed SYLFLAT 1000 ROUND 4000K 0053294

Product EAN number	5410288532943
Lamps	No
Included lamp	INTEGRATED LED

PHOTOMETRY

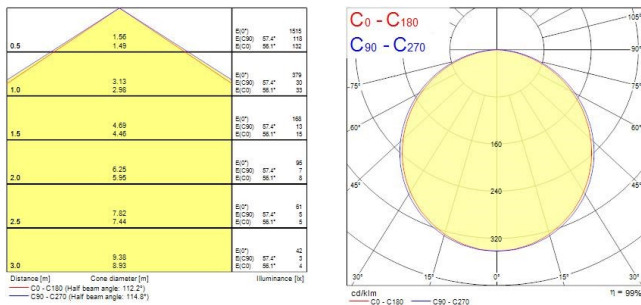

TECHNICAL DRAWINGS

